

Cable Pre-terminated AXAI - GigaPATCH™


GigaPatch™ pre-terminated cable with solid buffer can be supplied in MM and SM with common connector types. The cable is the equivalent to AXAI. The cable is supplied with a pulling tube that protects the fiber and it's connectors during shipping and installation. The fibers in the break-out comes with a 0.9 mm tube (ref. c in the picture). Installation of the connectors is carried out i.hht. according to the latest standard, and with the latest generation of test- and production tools. The cables and connectors are tested to be 100%, both visually, for RL (reflected signal) and IL (attenuation).

- Stable and high-quality
- Up to 48 fibre
- Halogen free and flam retardant cable LSFR0H
- Cable with loose buffer, to further QXAI
- fibre in the break-out supplied with a 0.9 mm tube
- Factory polished connectors
- Tested in according to i.hht current standards
- Visual inspection with 600x magnification of 100% of connectors
- Control of the connectors geometry, Radius, fibre height, Apex Offset, Ferrule and fibre end faces
- Production according to i.hht certified ISO9001: 2002 and ISO14001: 2004
- RoHS according to i.hht 2002/95/ES



Pulling tube

4F-8F supplied without drum at the lengths over 50m.
12F-24f supplied without a drum at the lengths over 20m.

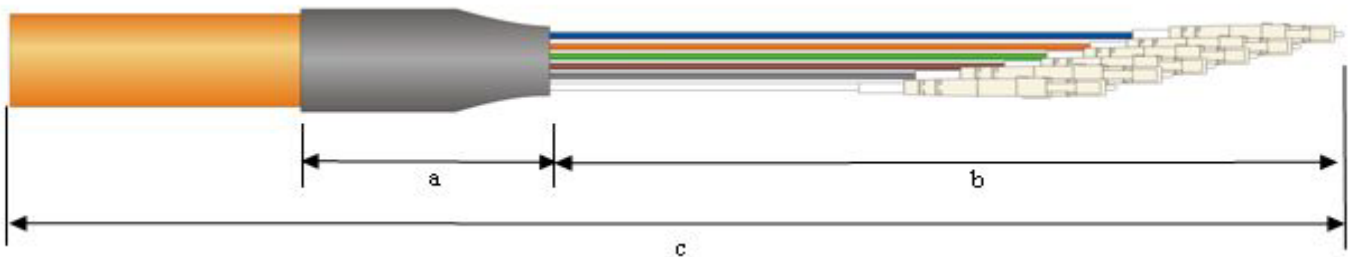

a: 130mm, b: break-out length, could be specified, c: cable length, customer specified

IL = Insertion loss RL = Reflection loss		Standard Connectors				MTRJ Connectors	
		SM			MM	SM	MM
		SPC	UPC	APC	-	SPC	-
Threshold	IL (dB)	<0,35	<0,35	<0,35	<0,35	<0,5	<0,75
Typical value	IL (dB)	0,15	0,12	0,15	0,14	0,22	0,20
Threshold	RL (dB)	>45	>50	>60	-	>45	-
Typical value	RL (dB)	49	53	62	-	48	-

Gigacom Türkiye

Sales Office :Haluk Türksoy Arkası Sok.
No:2 K:1 D:3 Altunizade
Üsküdar / İstanbul TR-34662

Tel : +90(216) 474 13 14
Fax : +90(216) 474 76 77
E-mail : info@gigacom-tr.com
Web : www.gigacom-tr.com

Ordering information

GKSUSU**0AYYxxxBU	Cable *F SM SC/UPC-SC/UPC xM AXAI blue LSOH
GKSASA**0AYYxxxBU	Cable *F SM SC/APC-SC/APC xM AXAI blue LSOH
GKFUFU**0AYYxxxBU	Cable *F SM FC/UPC-FC/UPC xM AXAI blue LSOH
GKFRFR**0AYYxxxBU	Cable *F SM FC/APCR-FC/UPCR xM AXAI blue LSOH
GKFNFN**0AYYxxxBU	Cable *F SM FC/APCN-FC/APCN xM AXAI blue LSOH
GKLULU**0AYYxxxBU	Cable *F SM LC/UPC/LC/UPC xM AXAI blue LSOH
GKLALA**0AYYxxxBU	Cable *F SM LC/APC-LC/APC xM AXAI blue LSOH
GKDUDU**0AYYxxxBU	Cable *F SM DIN/UPC-DIN/UPC xM AXAI blue LSOH
GKDADA**0AYYxxxBU	Cable *F SM DIN/APC-DIN/UPC xM AXAI blue LSOH
GKEUEU**0AYYxxxBU	Cable *F SM E2000/UPC-E2000/UPC xM AXAI blue LSOH
GKEAEA**0AYYxxxBU	Cable *F SM E2000/APC-E2000/UPC xM AXAI blue LSOH

*: Number of contacts (4, 8, 12, 24)

x: Cable length (025=25m, 050=50m, 100=100m etc.)

Other variations / combinations after agreement. See own data sheet for ordering information.

Gigacom Türkiye

Sales Office : Haluk Türksoy Arkası Sok.
No:2 K:1 D:3 Altunizade
Üsküdar / İstanbul TR-34662

Tel : +90(216) 474 13 14
Fax : +90(216) 474 76 77
E-mail : info@gigacom-tr.com
Web : www.gigacom-tr.com